


KUGELHÄHNE

MIT FIRE-SAFE ABNAHME
NACH BS 6755/2

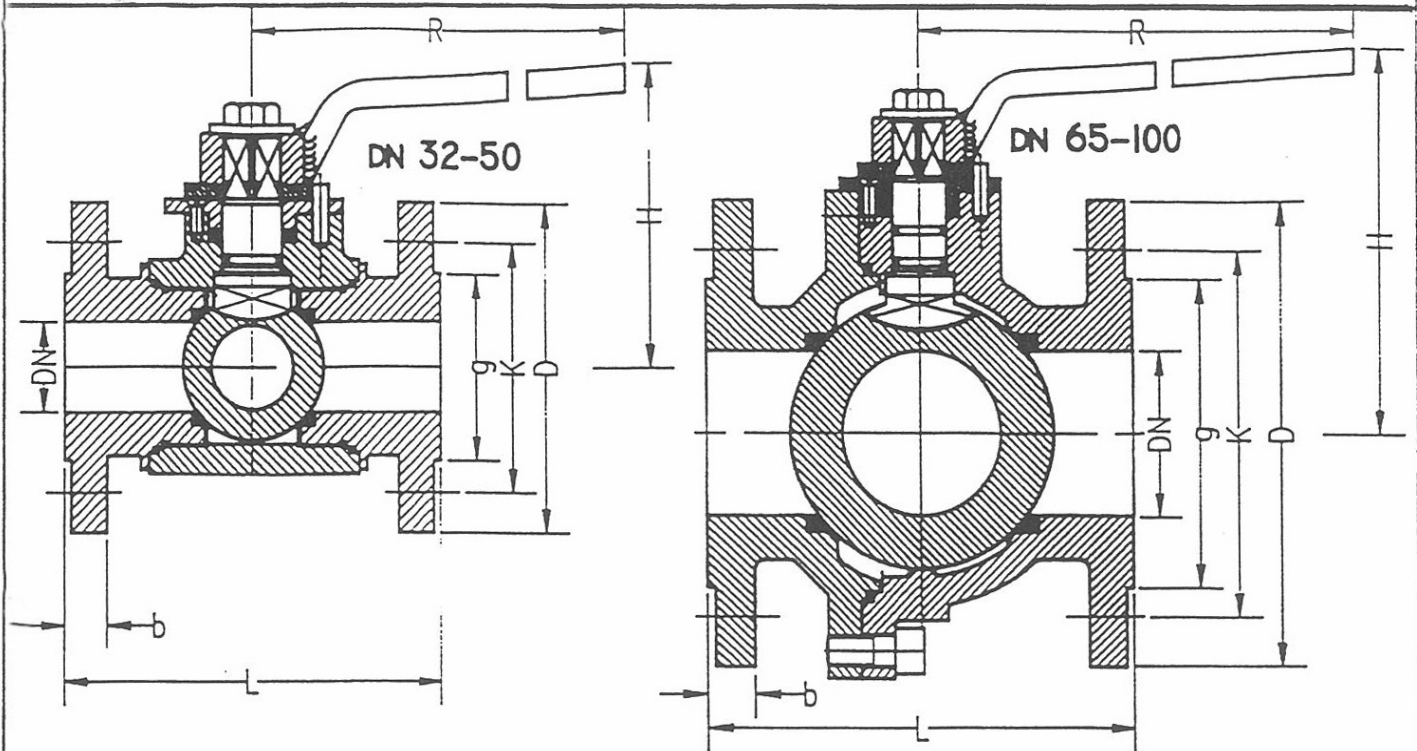

Werkstoffe

Bauteil	DN	Ausführung I	Ausführung II
Gehäuse	32-50	C22.8	C22.8
	65-100	GS-C25	GS-C25
Kugel u. Spindel	32-100	Niro 1.4408	Stahl hartverchromt
Dichtungen	32-100	PTFE/Graphit	PTFE/Graphit
Bauart DIN 3357 Baulänge DIN 3202-F4			

Flansch- anschlußmaße DIN 2501, Teil 1	DN	PN bar	L	D	g	K	b	z	d	H	R	SW1	Gew kg
	PN 10-40 DIN2635	32	40	130	140	78	100	18	4	18	117	250	17
40		40	140	150	88	110	18	4	18	121	250	17	7.1
50		40	150	165	102	125	20	4	18	128	250	17	9.1
PN 10-16 DIN2633	65	16	170	185	122	145	18	4	18	158	250	17	14.5
	80	16	180	200	138	160	20	8	18	182	350	22	18.6
	100	16	190	220	158	180	20	8	18	194	350	22	21.4
PN 25-40 DIN2635	65	40	170	185	122	145	22	8	18	158	250	17	17.8
	80	40	180	200	138	160	24	8	18	182	350	22	21.5
	100	40	190	235	162	190	24	8	22	194	350	22	24.6

Baulänge ANSI B 16.10

Flansch- anschlußmaße	DN		L	D	g	K	b	z	d	H	R	SW1	Gew kg
	mm	inch											
Class 150	32	1 1/4	140	117.5	63.5	88.9	15.9	4	15.9	117	250	17	6.4
	40	1 1/2	165	127	73	98.4	17.5	4	15.9	121	250	17	7.1
	50	2	178	152.4	92.1	120.6	19	4	19	128	250	17	9.1
	65	2 1/2	190	177.8	104.8	139.7	22.2	4	19	158	250	17	17.8
	80	3	203	190.5	121	152.4	23.8	4	19	182	350	22	21.5
	100	4	229	228.6	157.2	190.5	23.8	8	19	194	350	22	24.6